

WICANDERS

Everyday comfort.
Lifetime performance.

AMORIM CORK FLOORING

Created by Humans,
Inspired by Nature

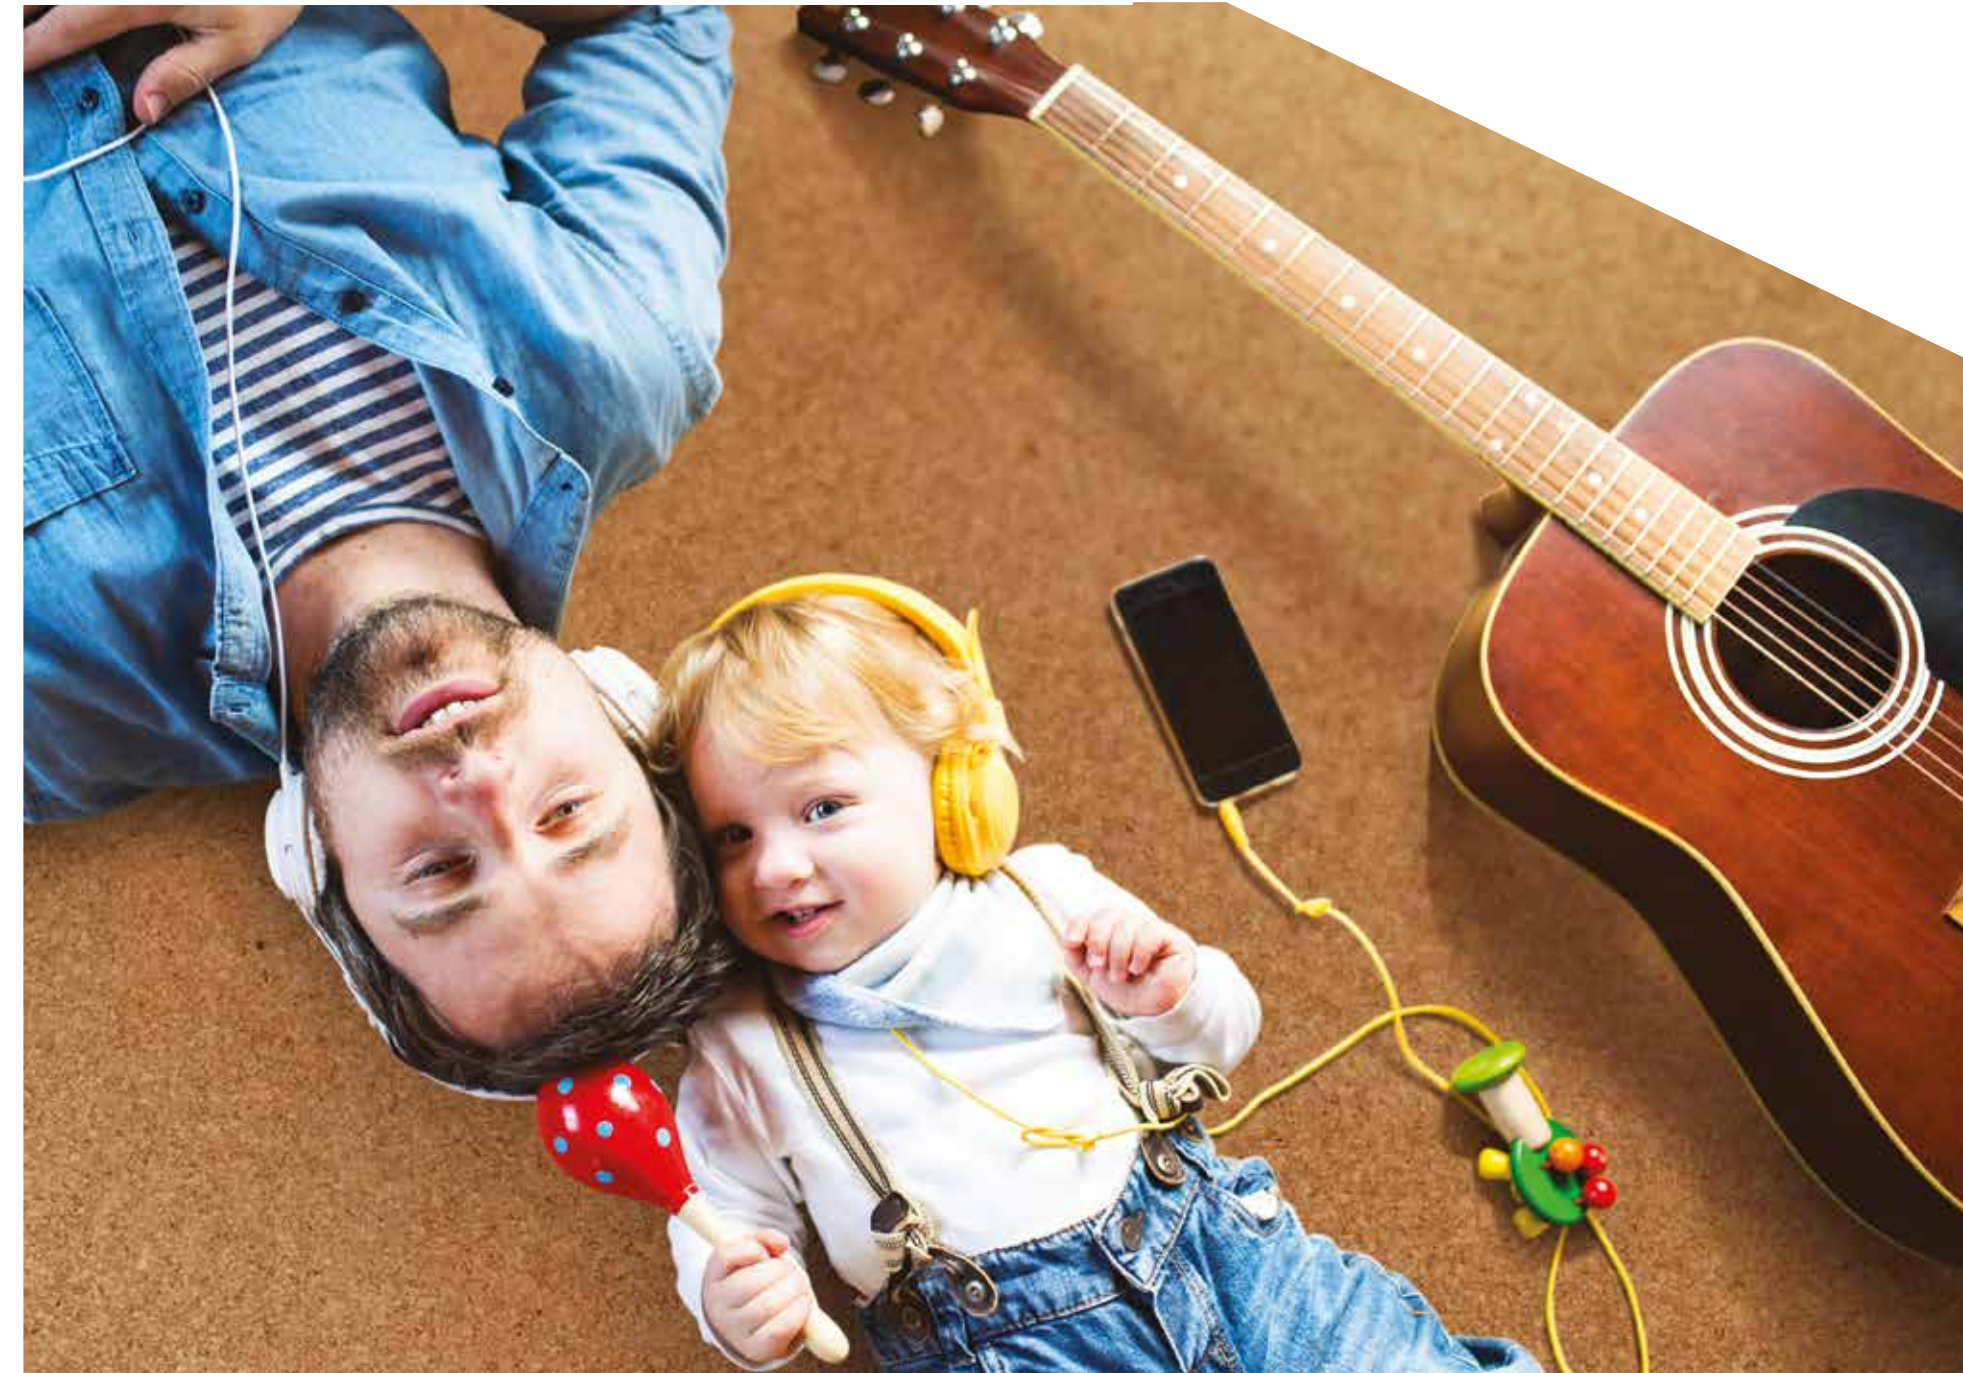

WICANDERS

Wicanders has a legacy that goes back to 1868. It is part of Amorim Cork Flooring, the global leading brand in cork-based flooring, present in more than 80 countries worldwide. Its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets. For all those wonderful and simple, yet sometimes unexpected moments, thanks to Wicanders durability and **performance**.

Over the years, Wicanders has developed sustainable flooring with exclusive properties due to its cork benefits. By combining state of the art technology with the exclusive natural properties of cork, a higher standard of **comfort** in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment that endures impacts and is very comfortable to walk and stand on.

**Wicanders means
everyday comfort, lifetime performance.**

AMORIM CORK FLOORING

CORK: Inspired by Nature

Inspired by Nature, Wicanders represents a unique balance between the creation of innovative products and the protection of the environment.

One of cork's most extraordinary properties can be found in its biological origins. In fact, extracting cork does not harm the tree from which it comes from. It is removed every nine years, and not a single tree is cut down in the process.

Cork is the outer bark of the cork oak tree (*Quercus suber* L.), a slowly growing tree from the Mediterranean with a lifespan of around 200 years and plays a central role in the environmental, economic and social development of this region.

With unique properties, cork is 100% natural and fully biodegradable, renewable and recyclable.

200 YEARS

The average lifespan of a cork oak tree.

100.000

Direct and indirect jobs are created by the cork industry.

NO TREES ARE DAMAGED

Or cut down.

9 YEARS

The period of time between each cork oak harvesting.

CORK HARVESTING

Is one of the highest paid agricultural job in the world.

Sustainable by heart

ENVIRONMENT



No Trees are damaged or cut down during the harvesting
The extraction of cork and its related industries are remarkably sustainable. This is because the tree is never cut down or damaged during the extraction process and the bark regenerates itself after each harvesting.



Positive ecological impact
For each ton of cork produced, the cork oak forest retains up to 73 tons of CO₂, helping to reduce Global Warming Potential (GWP).

ECONOMY



Rural areas economic engine
The cork oak forest is essential for the economic development of rural areas in the Mediterranean region, by creating jobs and activities related to the harvesting and treatment of cork. WWF estimates that more than 100,000 people are economically dependent of cork-related business activities.



One of the highest paid agricultural jobs
Cork harvesting is an activity that requires experience and high skills, to prevent damaging the tree during the process. Therefore this activity is one of the highest paid agricultural job in the world.

SOCIAL



Crossing generations
More than a job, harvesting is a handcraft work that requires a deep knowledge of the forest and the technique. Thus to be able to perform this activity takes several years of training, a know-how that crosses family generations.




Prevent rural desertification
Cork harvesting is a regular and cyclical process, creating a continuous activity that contributes to settle people in areas at risk of desertification.

From Nature, to your special space.

Our products are designed to resist under the toughest conditions, always with incredible stability and exceptional **performance**.

Cork offers a world of **comfort** to be discovered by your feet.

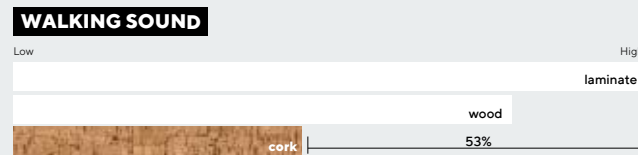


Silence

Reduces the walking sound up to 53%.



Impact Resistance

Highest shock absorbing performance.

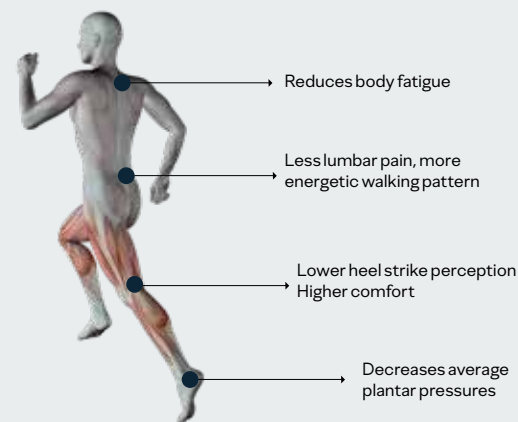

Walking Comfort

Wicanders cork floors are the perfect mix to reduce heel strike impacts and related body tensions, but stable enough to help the foot impulse and provide the needed stability to reduce effort on walking and decrease body fatigue.




Indoor Air Quality

Compliance with the strictest indoor air quality standards after being tested on over 2000 potential chemicals.



INFRARED FOOT TEMPERATURE

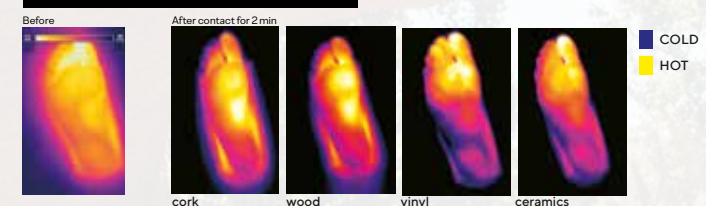

Natural Thermal Insulation

Optimal floor temperature all year round.



cork	Go	10
	Essence	16
wood	Go	28
	Resist	38
	Infinitus	44
	Resist ECO	48
	Essence	56
	Hydrocork	64
stone	Essence	77



cork Go

Formats 905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"



Developed to be an easy and practical floor with the unique beauty of timeless cork designs that gives a seamless look to the floor. A sustainable product that is ideal for residential use. Cork Go takes advantage of the thermal and accoustical benefits of cork while providing ease of maintenance and outstanding comfort when walking barefoot.



Dream



GB05003
Dream
80001642
905 x 295 x 10,5mm



MF01003
Earth Tones Grit
80002131
905 x 295 x 10,5mm



GB09002
Impulse
80001645
905 x 295 x 10,5mm



C87Y001
Serenity
80001286
905 x 295 x 10,5mm



MF02002
Earth Tones Sand
80002133
905 x 295 x 10,5mm



C87V001
Affection
80001283
905 x 295 x 10,5mm



GB01003
Charm
80001636
905 x 295 x 10,5mm



GB10002
Appeal
80001646
905 x 295 x 10,5mm



NEW

MF03003
Earth Tones Mud
80002135
905 x 295 x 10,5mm




C87X001
Gloomy
80001285
905 x 295 x 10,5mm



C87W001
Addict
80001284
905 x 295 x 10,5mm



GB06002
Ambition
80001643
905 x 295 x 10,5mm

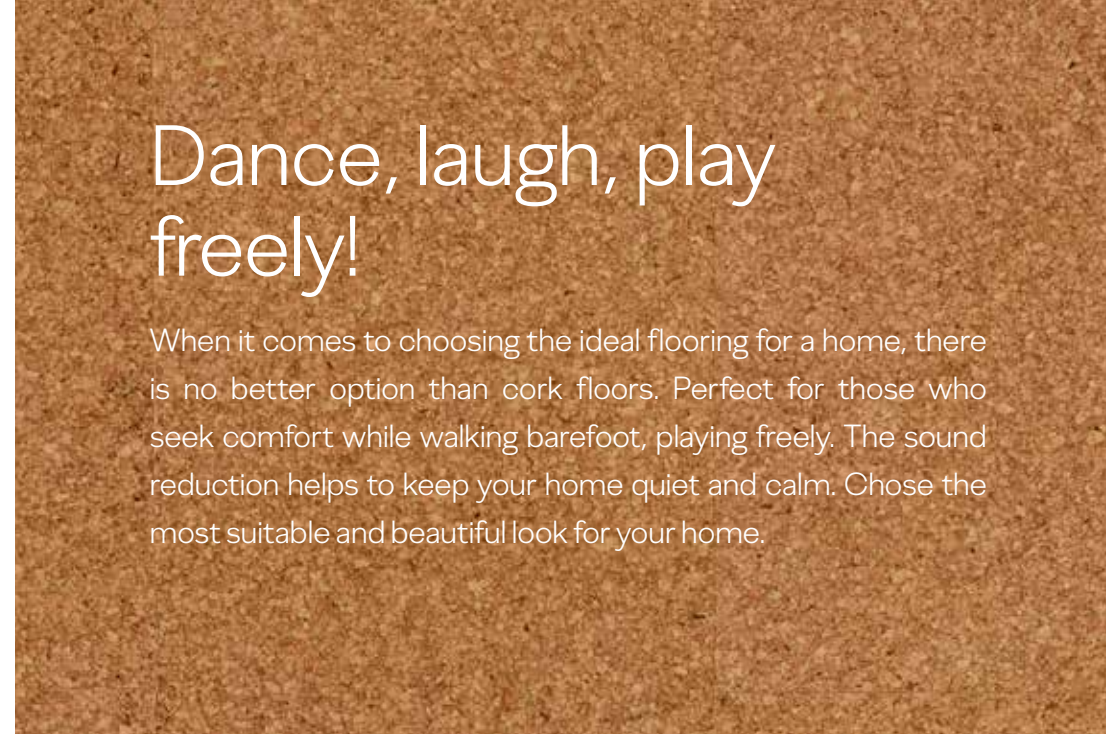

GA01002
Moment
80001631
905 x 295 x 10,5mm



GA21003
Desire
80001633
905 x 295 x 10,5mm



Desire



C824001
Captivation
80001219
905 x 295 x 10,5mm



C8D2001
Blase
80001298
905 x 295 x 10,5mm



C822001
Whim
80001218
905 x 295 x 10,5mm



GB03002
Attraction
80001640
905 x 295 x 10,5mm



MF05003
Earth Tones Argil *
80002139
905 x 295 x 10,5mm



GB02002
Allure
80001638
905 x 295 x 10,5mm



MF06002
Earth Tones Soil
80002141
905 x 295 x 10,5mm



MF04003
Earth Tones Concrete
80002137
905 x 295 x 10,5mm

* minimum order quantity: 250 m²



Earth Tones Argil

Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 2,6MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 0,8MM

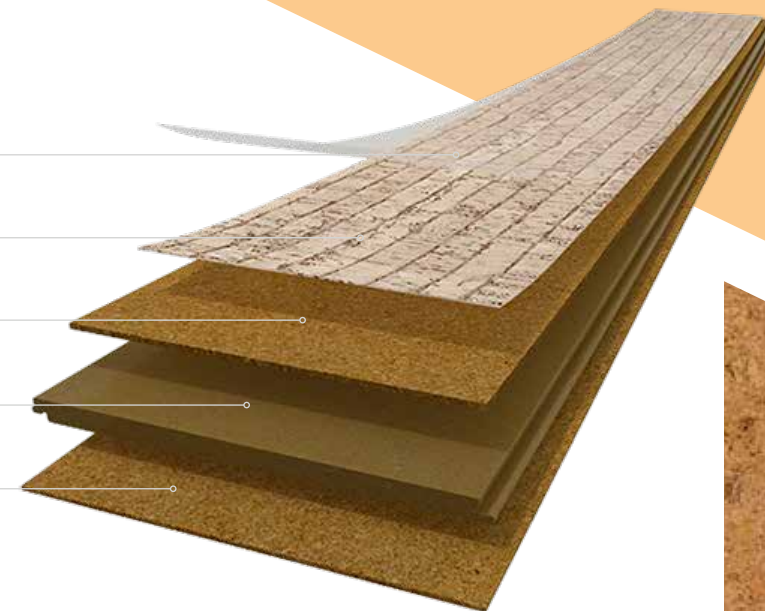

Finishing & Warranty



XtraMatt surface has a unique natural look and feel, combined with the resistance and performance of a UV finish, focused on environmental friendly properties and ease of maintenance.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



7 POINTS



8 POINTS

cork Essence

Formats 905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"
1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Floating

Rich in style, charm and sophistication, cork Essence expresses its personality through the unique designs and formats aligned with modern interior design trends. In harmony with nature, each board is unique. The ideal floor for creating ambiances full of charm, combined with the unique comfort of cork and the performance requirements of residential and light commercial applications.



Fashionable Glacier



C85J001

Fashionable Glacier

80001244

905 x 295 x 10,5mm



I801002

Identity Moonlight

80001650

905 x 295 x 10,5mm



P801002

Personality Moonlight

80002260

905 x 295 x 10,5mm



Identity Moonlight



Personality Moonlight



C83R002

Lane Timide *

80001224

1220 x 185 x 10,5mm



P802002

Personality Timide

80002262

905 x 295 x 10,5mm



C88N001

Fashionable Jasmim *

80001289

905 x 295 x 10,5mm



Lane Timide



C81O003
Linn Blush
80001212
905 x 295 x 10,5mm



C81N002
Linn Moon
80001211
905 x 295 x 10,5mm



Fashionable Antique White

When Nature meets charm

In modern interior design, the creation of spaces with style and personality starts with beautiful and expressive floors. Aligned with the market trends, our team of experts has created a unique collection that combines different shapes of natural Cork.

Rich in style, charm and sophistication, and in harmony with nature, this collection also provides a sense of wellbeing that will make more pleasant getting together with friends and family.



I802002
Identity Timide
80001651
905 x 295 x 10,5mm



C85L001
Fashionable Cement
80001246
905 x 295 x 10,5mm



I803002
Identity Silver
80001652
905 x 295 x 10,5mm



C88Q001
Fashionable Antracite *
80001292
905 x 295 x 10,5mm



C88K001
Fashionable Antique White *
80001288
905 x 295 x 10,5mm



C85M001
Fashionable Grafite
80001247
905 x 295 x 10,5mm



I810002
Identity Tea
80001657
905 x 295 x 10,5mm




P810002
Personality Tea
80002266
905 x 295 x 10,5mm



C85N001
Fashionable Macchiato
80001249
905 x 295 x 10,5mm



C88P001
Fashionable Marfim *
80001291
905 x 295 x 10,5mm

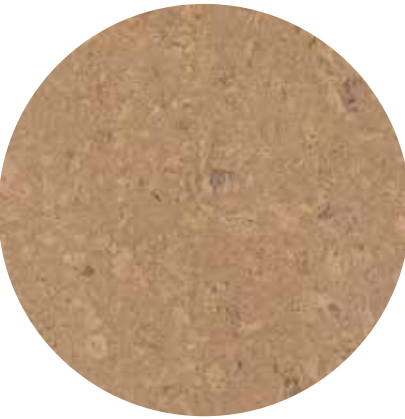

P805002
Personality Champagne
80002263
905 x 295 x 10,5mm



I805002
Identity Champagne
80001653
905 x 295 x 10,5mm



O8G2001
Novel Edge Natural
80001300
905 x 295 x 10,5mm



O824003
Originals Shell
80002239
905 x 295 x 10,5mm



O801007
Originals Natural
80002234
905 x 295 x 10,5mm



C84M001
Traces Tea *
80001239
1220 x 185 x 10,5mm



C84N001
Traces Spice *
80001240
1220 x 185 x 10,5mm 4



O830003
Originals Symphony
80002241
905 x 295 x 10,5mm



O821005
Originals Harmony
80002236
905 x 295 x 10,5mm



O841002
Originals Accent
80002243
905 x 295 x 10,5mm



Traces Spice



O849003
Originals Dawn
80002244
905 x 295 x 10,5mm



O822002
Originals Character
80002238
905 x 295 x 10,5mm



O83S003
Lane Chestnut *
80001227
1220 x 185 x 10,5mm 4



C85R002
Traces Chestnut *
80001252
1220 x 185 x 10,5mm 4



P832002
Personality Chestnut
80002268
905 x 295 x 10,5mm



I832002
Identity Chestnut
80001662
905 x 295 x 10,5mm



I821002
Identity Nightshade *
80001660
905 x 295 x 10,5mm



Identity Chestnut

Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 2,6MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 0,8MM

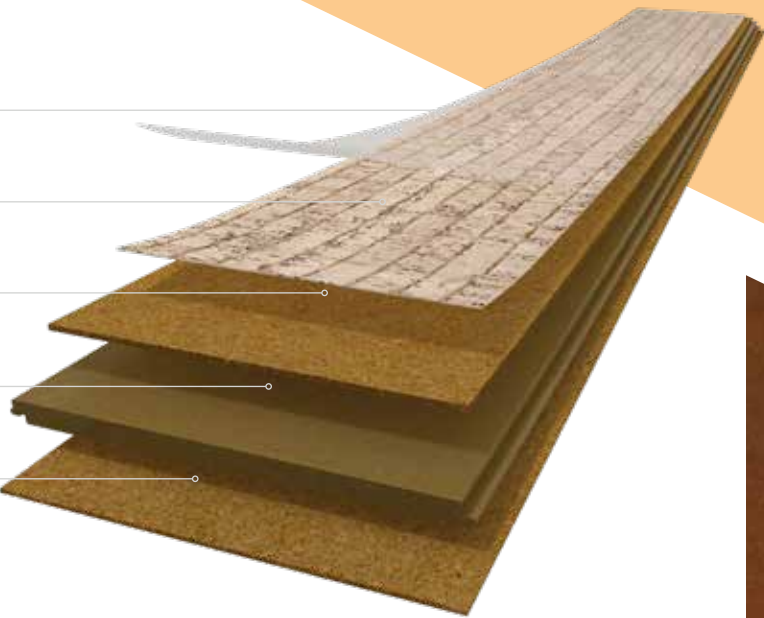

Finishing & Warranty



XtraMatt+ surface is a High Resistance Acrylic UV finish suitable for residential and light commercial areas. It enhances the natural beauty and environmental friendly properties of cork floors, while assuring a high performance for a long time.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



Technical Data Sheet

Floating			cork Go	cork Essence
Dimension (LxWxT)	-	-	905x295x10,5 mm	905x295x10,5 mm 1220x185x10,5 mm
Mass per unit	-	Kgs / sqm	7,68	7,68
Packaging (box / pallet)	-	sqm	2,136 / 111,072	2,136 / 111,072 - 905x295x10,5 mm 1,806 / 79,464 - 1220x185x10,5 mm
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	-	31
Standard-Test Method			Unit	
General Properties			EN 12104 - EN 20326	
Thickness, t -	EN ISO 24346	± 0,25	Complies	Complies
Length, l	EN ISO 24342	+/- 0,5%	Complies	Complies
Width, w	EN ISO 24342	+/- 0,10%	Complies	Complies
Squareness, q	EN ISO 24342	< 0,2	Complies	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0,25 %	Complies	Complies
Classification Properties			EN 12104 - EN 20326	
Wear resistance IP	EN 14354 (Annex D)	≥ 1 000 cycles	Complies	Complies
Castor chair resistance	ISO 4918	25 000 cycles	Complies	Complies
Simulated movement of a furniture leg	Visual	No damage shall be visible after testing with a foot type 2	Complies	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,4 mm	Complies	Complies
Swelling	ISO 24336	≤ 20%	Complies	Complies
Safety Properties			EN 14041	
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Dfl-s1	C fl-s1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable	Undetectable
Additional properties				
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16	16
Walking noise	IHD-W431	dB	~3,2	13,2
		%	51,6	51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m2·K/W	R≤ 0,150	R≤ 0,150

(a1) The following products were tested: Disinfectant, Petroleum spirit, C₂H₅OH, NH₃OH, Citric acid and Iodine.
(a2) The following products were tested: acetone, coffee, NaOH, H₂O₂, shoe polish.
(b1) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong change.
(b2) Grade 5 - no visible change / Grade 4 - very minor changes / damages at the surface / Grade 3 - minor changes / damages at the surface / Grade 2 - Strong changes / damages at the surface / Grade 1 - Surface destruction.



wood
Be different
Stay in your comfort zone.

wood Go

Formats 1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Floating floor with classic wood visuals and a multilayer cork structure for added performance in terms of thermal and acoustic insulation.

This practical solution is ideal for those who like the beauty of wood combined with an easy to maintain and scratch resistant surface.



Washed Moon Oak



BOVM001

Washed Moon Oak
80000582
1220 x 185 x 10,5mm



LJN2001

Ivory Salt Oak
80001950
1220 x 185 x 10,5mm



BON9001

Frozen Oak
80000521
1220 x 185 x 10,5mm



LJW3001

Quartz Larch
80002092
1220 x 185 x 10,5mm



LJUX001

Oak Light Gris
80002055
1220 x 185 x 10,5mm



LJVZ001

Oak Modern Gris
80002090
1220 x 185 x 10,5mm



LJN3001

Storm Oak
80001953
1220 x 185 x 10,5mm





BOVI001
Pastel Oak
80000579
1220 x 185 x 10,5mm



BOVB001
Argent Oak
80000577
1220 x 185 x 10,5mm



Washed Tundra Oak

Argent Oak



BOVP001
Washed Desert Oak
80000583
1220 x 185 x 10,5mm



BOVK001
Washed Tundra Oak
80000581
1220 x 185 x 10,5mm



LJR9004
Polar Nature Oak
80002012
1220 x 185 x 10,5mm



LJWB001
Limed White Rustic Oak
80002098
1220 x 185 x 10,5mm



LJW6001
Old Larch
80002094
1220 x 185 x 10,5mm



LJUY001
Oak Light Nature
80002057
1220 x 185 x 10,5mm



LJUZ001
Oak Nature
80002059
1220 x 185 x 10,5mm



LJWA001
Oil Taupe Oak
80002097
1220 x 185 x 10,5mm



LJN4001
Hard Oak
80001957
1220 x 185 x 10,5mm



LJS0005
Fall Pine
80002020
1220 x 185 x 10,5mm



LJS1004
Highland Pine
80002028
1220 x 185 x 10,5mm



LJS2004
Classic Cherry*
80002034
1220 x 185 x 10,5mm

* minimum order quantity: 250 m2



Oil Taupe Oak



LJN6001
Savan Limed Oak
80001961
1220 x 185 x 10,5mm



BOVC001
Linen Oak
80000578
1220 x 185 x 10,5mm



BOQ0003
Alaska Oak
80000537
1220 x 185 x 10,5mm



LJN5001
Limed Oak
80001959
1220 x 185 x 10,5mm

wood Go



LJY6001

Oak Rustic
80002109
1220 x 185 x 10,5mm



LJW5001

Natural Larch
80002093
1220 x 185 x 10,5mm



Chalk Oak

WICANDERS



BOWX001

Caribbean Oak
80000592
1220 x 185 x 10,5mm



BOVJ001

Almond Oak
80000580
1220 x 185 x 10,5mm



B0Q1003

Chalk Oak
80000538
1220 x 185 x 10,5mm



LJS5005

Indian Dark Oak
80002045
1220 x 185 x 10,5mm



LJN1001
Honey Oak
80001949
1220 x 185 x 10,5mm



LJS3005
Classic Nature Oak
80002037
1220 x 185 x 10,5mm



LJWC001
Rustic Taupe Oak
80002100
1220 x 185 x 10,5mm



LJS4005
Shield Oak *
80002040
1220 x 185 x 10,5mm



B009001
Light Sucupira
80000526
1220 x 185 x 10,5mm

* minimum order quantity: 250 m²

Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



Finishing & Warranty



Suitable for heavy traffic residential areas and moderate traffic commercial areas.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



wood Resist

Formats 1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Design to resist in high traffic commercial areas, this floating floor solution is easy to install, absorbs subfloor irregularities and delivers an excellent technical performance. The wood visuals with traditional patterns are the best choice for those who want spaces full of class, but with the unmatched comfort of cork and a worry free heavy duty surface.



Sand Oak



BOR0001
Linen Cherry
80000543
1220 x 185 x 10,5mm



BOR1001
Sand Oak
80000544
1220 x 185 x 10,5mm



BOV4001
Nordic Ash
80000571
1220 x 185 x 10,5mm



BOWR001
Wheat Oak
80000590
1220 x 185 x 10,5mm



Linen Cherry



Sawn Bisque Oak



B0T7001
Limed Grey Oak
80000562
1220 x 185 x 10,5mm



B0R3001
Wheat Pine
80000545
1220 x 185 x 10,5mm



B0WT001
Arcadian Artic Pine *
80000591
1220 x 185 x 10,5mm



B0P3001
Sawn Bisque Oak
80000530
1220 x 185 x 10,5mm



B0U0001
Rustic Limed Gray Oak
80000564
1220 x 185 x 10,5mm



B0P2001
Sawn Twine Oak
80000529
1220 x 185 x 10,5mm



B0P4001
Arcadian Soya Pine
80000531
1220 x 185 x 10,5mm

Creating solutions. Reinventing comfort.

When choosing the perfect tone to complement your special space, Wicanders has all the solutions to match your personal style, while enduring the test of time.

Wicanders products are impact resistant and acoustical and thermal insulators, providing a sense of well-being.



Limed Grey Oak



Nature Oak



BOT5001
Nature Oak
80000560
1220 x 185 x 10,5mm



BOR4001
Elegant Oak
80000546
1220 x 185 x 10,5mm



BOP5001
Arcadian Rye Pine
80000532
1220 x 185 x 10,5mm



BOP0001
Castle Raffia Oak
80000527
1220 x 185 x 10,5mm

Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



Finishing & Warranty



Suitable for heavy traffic residential areas
and heavy traffic commercial areas.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



8 POINTS



NEW



B4TE001

Grey Majestic Oak

80000604

1840 x 220 x 8mm

NEW



B4TI001

Colossal Shadow Oak

80000608

1840 x 220 x 8mm

NEW



B4TH001

Colossal Light Oak

80000607

1840 x 220 x 8mm



Colossal Light Oak

NEW



B4TF001

Prodigy Bright Oak

80000605

1840 x 220 x 8mm

NEW



B4TA001

Smooth Solid Oak

80000600

1840 x 220 x 8mm

NEW



B4TG001

Prodigy Pearl Oak

80000606

1840 x 220 x 8mm

NEW



B4TB001

Light Majestic Oak

80000601

1840 x 220 x 8mm

4 4 sides beveled

45



Natural Majestic Oak



B4TC001
Natural Majestic Oak 4M
80000602
1840 x 220 x 8mm



B4TD001
Brown Majestic Oak 4M
80000603
1840 x 220 x 8mm

4M 4 sides beveled

Technical solution

PROTECTIVE WEAR LAYER

WOOD HIGH RESOLUTION IMAGE

SPC CORE

INTEGRATED CORK UNDERLAY 1,5MM



Finishing & Warranty



Suitable for heavy traffic residential areas
and heavy traffic commercial areas.



wood Resist ECO

Formats

1220 x 185 x 10,5 mm

48 x 71/4 x 3/8"

Floating

Resist Eco is a PVC free surface available in an extensive collection of wood visuals. Designed to withstand the needs of our daily lives and commercial areas due to its wear resistance and indoor air quality credentials. The cork top layer gives the product an outstanding comfort, while reducing the walking sound. The perfect combination between the beauty of wood and the performance, stability, comfort and ease of maintenance.

Diamond Oak

48

NEW

FDYW001

Glacial Pine

80001627

1220 x 185 x 10,5mm

4

NEW

FDYX001

Gold Coast Oak

80001628

1220 x 185 x 10,5mm

4

NEW

FDX5001

Mount Logan Oak

80001610

1220 x 185 x 10,5mm

4

FDYF001

Ocean Oak

80001619

1220 x 185 x 10,5mm

4

NEW

FDYU001

Castle Mountain Oak

80001625

1220 x 185 x 10,5mm

4

NEW

FDYI001

Diamond Oak

80001621

1220 x 185 x 10,5mm

4

NEW

FDYY001

California Chestnut

80001629

1220 x 185 x 10,5mm

4

Gold Coast Oak

4

4 sides beveled

49



Rain Forest Oak

There is no place like home.

Flooring is one of the most important decisions when decorating a space. The colour and style you choose for the floor will set the tone for the whole ambiance, reflecting your personality and your style.

These looks will layer up your working space with organic warmth that feels both fresh and real, light and grounded.



FDX7001

Rain Forest Oak 4M
80001612
1220 x 185 x 10,5mm



4 sides beveled



FDYD001

Royal Oak 4M
80001617
1220 x 185 x 10,5mm



Royal Oak



FDY7001

Redwood Forest Oak 4M
80001613
1220 x 185 x 10,5mm



FDX6001

Mount Fuji Oak 4M
80001611
1220 x 185 x 10,5mm



4 sides beveled



Mountain Oak



NEW

FDY8001
Mount Everest Oak 4M
80001614
1220 x 185 x 10,5mm



FDYB001
Sprucewood 4M
80001616
1220 x 185 x 10,5mm



FDYG001
Field Oak 4M
80001620
1220 x 185 x 10,5mm



Sprucewood



FDYA001
Mountain Oak 4M
80001615
1220 x 185 x 10,5mm

4M 4 sides beveled



FDYE001
Manor Oak 4M
80001618
1220 x 185 x 10,5mm

4M 4 sides beveled



FDYL001
Mocca Oak 4M
80001623
1220 x 185 x 10,5mm



Manor Oak



FDYM001
Quartz Oak 4M
80001624
1220 x 185 x 10,5mm



FDYV001
Black Forest Oak 4M
80001626
1220 x 185 x 10,5mm



FDYK001
Dark Onyx Oak 4M
80001622
1220 x 185 x 10,5mm

4M 4sides beveled

Technical solution

PVC-FREE PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE FILM

AGGLOMERATED CORK 1,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 2,2MM



Finishing & Warranty



Suitable for heavy traffic residential areas
and heavy traffic commercial areas.



wood Essence

Formats 1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"
1830 x 185 x 11,5 mm
72 x 7 1/4 x 1/2"



Wood Essence offers the beauty of long plank wood looks with a multilayered structure composed by cork that provides a higher standard in terms of stability, performance and walking comfort. The 3,2mm cork top layer will provide an exceptional thermal and acoustic insulation and a natural look and feel.



Washed Arcaine Oak



D8G2001

Washed Haze Oak

80001501
1830 x 185 x 11,5mm



D8F6001

Prime Arctic Oak

80001484
1830 x 185 x 11,5mm



D8F5001

Prime Desert Oak

80001481
1830 x 185 x 11,5mm



D8F5002

Prime Desert Oak

80001482
1220 x 185 x 10,5mm



D8G1001

Washed Arcaine Oak

80001498
1830x185 x 11,5mm



D8G1002

Washed Arcaine Oak

80001499
1220 x 185 x 10,5mm



D8F1001

Dapple Oak

80001469
1830x185 x 11,5mm





D8G4001
Washed Castle Oak 4
80001506
1830x185 x 11,5mm



D8G4002
Washed Castle Oak
80001507
1220 x 185 x 10,5mm



D886003
Platinum Chalk Oak 4
80001446
1830x185 x 11,5mm



D885003
Nebraska Rustic Pine 4
80001444
1830x185 x 11,5mm



4 sides beveled



Nebraska Rustic Pine



D8G3001
Washed Highland Oak 4
80001503
1830x185 x 11,5mm



D8G3002
Washed Highland Oak 4
80001504
1220 x 185 x 10,5mm



D887004
Ivory Chalk Oak 4
80001449
1830x185 x 11,5mm





D8H6001
Classic Nordic Pine * 4
80001509
1830x185 x 11,5mm



D8F4001
Classic Prime Oak 4
80001477
1830x185 x 11,5mm



D8F4002
Classic Prime Oak
80001478
1220 x 185 x 10,5mm



D8F7001
Golden Prime Oak 4
80001487
1830x185 x 11,5mm



Rustic Forest Oak



D8F7002
Golden Prime Oak
80001488
1220 x 185 x 10,5mm



D884004
Prime Rustic Oak 4
80001441
1830x185 x 11,5mm



D8G0001
Rustic Forest Oak 4
80001495
1830x185 x 11,5mm



D8F8001
Country Prime Oak 4
80001490
1830x185 x 11,5mm



D8F9001
Rustic Eloquent Oak 4
80001492
1830x185 x 11,5mm





Classic Walnut



D8H8001
Classic Sucupira 4M
80001511
1830x185 x 11,5mm



D8H7001
Classic Walnut 4M
80001510
1830x185 x 11,5mm



D8F3001
Nebula Oak 4M
80001474
1830x185 x 11,5mm



D8F2001
Coal Oak 4M
80001472
1830x185 x 11,5mm

Technical solution


PROTECTIVE SURFACE

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY

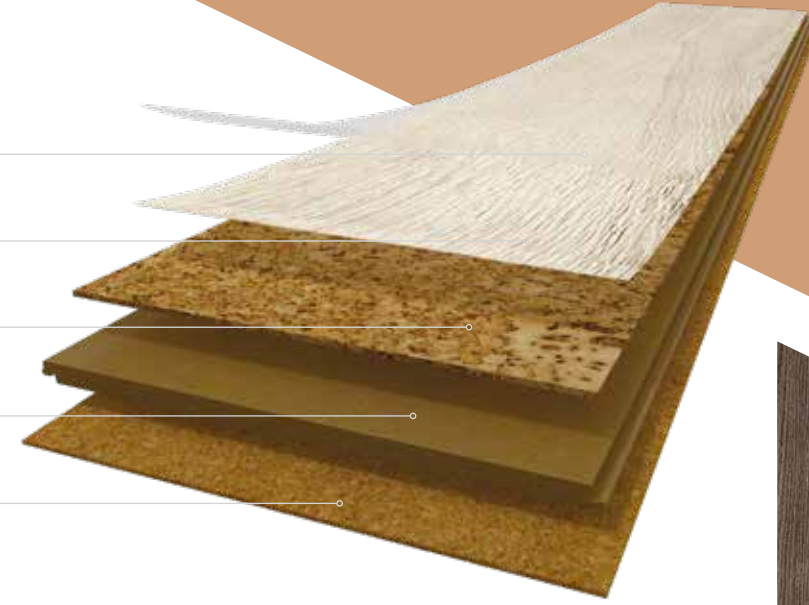

Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



8 POINTS

woodhydracork

Formats1225 x 195 x 6mm
48 7/32 x 7 11/16 x 1/4"

PressFit

Floating

Hydrocork is a low thickness and waterproof floating solution that combines extreme performance with the comfort of cork. The innovative core made of composite cork is waterproof and incredibly stable, while its surface offers a wear resistance suitable for heavy commercial areas.

The product's low thickness makes it also the optimal choice for renovation projects. The revolutionary PressFit compression system allows for a fast and easy installation.

Claw Silver Oak

B5R0002

Linen Cherry

80000642

1225x195 x 6mm

4

B5WR001

Wheat Oak

80000665

1225x195 x 6mm

4

B5V3003

Claw Silver Oak

80000661

1225x195 x 6mm

4

B5T7002

Limed Grey Oak

80000656

1225x195 x 6mm

4

B5T0002

Light Beech

80000652

1225x195 x 6mm

4

B5R1002

Sand Oak

80000644

1225x195 x 6mm

4

B5R3002

Wheat Pine

80000646

1225x195 x 6mm

4

Hydrocork wood visuals will endure the test of time and make any space feel more welcoming.

Whether you choose a traditional or contemporary look, Hydrocork will provide the perfect solution to match your design style.

4

4 sides beveled

65

wood Hydrocork



B5P3002
Sawn Bisque Oak 4M
80000624
1225x195 x 6mm



B5P2002
Sawn Twine Oak 4M
80000622
1225x195 x 6mm



B5WS001
Light Dawn Oak 4M
80000666
1225x195 x 6mm



B5Q0002
Alaska Oak 4M
80000636
1225x195 x 6mm

4M 4 sides beveled



Alaska Oak



B5P0002
Castle Raffia Oak 4M
80000618
1225x195 x 6mm



B5P4003
Arcadian Soya Pine 4M
80000627
1225x195 x 6mm



Castle Raffia Oak



Sylvan Gold Oak



B5P5003

Arcadian Rye Pine

80000630

1225x195 x 6mm

B5Q1002

Chalk Oak

80000638

1225x195 x 6mm



B5Q2002

European Oak

80000640

1225x195 x 6mm



B5T5002

Nature Oak

80000654

1225x195 x 6mm



B5R4002

Elegant Oak

80000648

1225x195 x 6mm



B5L8001

Sylvan Gold Oak

80000616

1225x195 x 6mm



B5P1002

Castle Toast Oak

80000620

1225x195 x 6mm



wood Hydrocork



B5WQ001

Sylvan Brown Oak 4M
80000664
1225x195 x 6mm



B5WU001

Rustic Fawn Oak 4M
80000668
1225x195 x 6mm



4 sides beveled



B5P7002

Century Fawn Pine 4M
80000634
1225x195 x 6mm



WICANDERS



B5WT001

Arcadian Artic Pine 4M
80000667
1225x195 x 6mm



B5R7002

Cinder Oak 4M
80000650
1225x195 x 6mm



wood Hydrocork



B5WV001
Rustic Grey Oak 4M
80000669
1225x195 x 6mm



B5P6002
Century Morocco Pine 4M
80000632
1225x195 x 6mm



Century Morocco Pine

Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER



Finishing & Warranty



Suitable for heavy traffic residential areas and heavy traffic commercial areas.



*Please see the terms and conditions of Wicanders Limited Warranty on the website.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



Technical Data Sheet

	Standard	Unit	wood Go	wood <i>Infinitas</i>	wood Resist ECO
Dimension (LxWxT)	-	mm	1220x185x10,5	1840x220x8	1220x185x10,5
Mass per unit	-	Kgs / sqm	9,80	11,6	8,37
Packaging (box / pallet)	-	sqm	1,806 / 79,464	2,429 / 77,728	1,806 / 72,240
Level of use Domestic	ISO 10874	Class	23	23	23
Level of use Commercial	ISO 10874	Class	32	33	33
General Properties - EN 16511					
Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies	Complies	Complies
Length, l	ISO 24337	$\leq 1\,500$ mm: $\Delta l \leq 0,5$ mm / $> 1\,500$ mm: $\Delta l \leq 0,3$ mm/m	Complies	Complies	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies	Complies	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies	Complies	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies	Complies	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies	Complies	Complies
Classification properties - EN 16511					
Wear resistance IP	EN 15468 - annex A EN 15468, procedure B	$\geq 1\,500$ cycles $\geq 5\,000$ cycles	Complies -	- Complies	- Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 800 mm	Complies	Complies	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 4 Group 3: grade 3	Complies	Complies	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,3$ mm	Complies	Complies	Complies
Swelling	ISO 24336	≤ 20 %	Complies	Complies	Complies
Locking system	ISO 24334	KN/m	-	Complies	-
Micro-scratch	EN 16094	\leq MSR-A2	-	Complies	-
Dimensional Stability (heat conditions)	ISO 23999	$\leq 0,25$ %	-	Complies	-
Safety properties - EN 14041					
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Bfl-s1	Bfl-s1	Dfl-s1
Slip Classification	EN 13893	Class	DS	DS	DS
Slip Resistance	DIN 51130	Class	-	R9	E1
Formaldehyde emission	EN 717-1	Class	E1	E1	Not antistatic
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable	Undetectable	Undetectable
Additional properties					
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16	15	17
Thermal resistance (Thermal conductivity)	EN 12667 EN 12667:2001	(m²K)/W	R <0,112 -	- 0,0399	-


	Standard	Unit	wood Resist	wood Essence	wood Hydrocork
Dimension (LxWxT)	-	-	1220x185x10,5 mm	1220x185x10,5 mm 1830x185x11,5 mm	1225 x 195 x 6 mm
Mass per unit	-	Kgs / sqm	9,8	9,72 - 1830x185 mm 8,62 - 1220x185 mm	8,12
Packaging (box / pallet)	-	sqm	1,806 / 72,240	2,031 / 89,364 - 1830x185 mm 1,806 / 79,464 - 1220x185 mm	1,672 / 93,632
Level of use Domestic	ISO 10874	Class	23	23	23
Level of use Commercial	ISO 10874	Class	33	32	33
General Properties - EN 16511			EN 16511	EN 12104 - EN 20326	EN 16511
Thickness, t -	EN ISO 24346 ISO 24337	$\pm 0,25$ $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies -	- Complies	- Complies
Length, l	EN ISO 24342 ISO 24337	$\pm/- 0,5$ % $\leq 1\,500$ mm: $\Delta l \leq 0,5$ mm / $> 1\,500$ mm: $\Delta l \leq 0,3$ mm/m	Complies -	- Complies	- Complies
Width, w	EN ISO 24342 ISO 24337	$\pm/- 0,10$ % $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies -	- Complies	- Complies
Squareness, q	EN ISO 24342 ISO 24337	$< 0,2$ $max \leq 0,20$ mm	Complies -	- Complies	- Complies
Straightness, s	EN ISO 24342 ISO 24337	$\leq 0,30$ $max \leq 0,30$ mm/m	Complies -	- Complies	- Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies	Complies	Complies
Dimensional Stability	ISO 20326 (Anex C)	$\leq 0,25$ %	Complies	-	-
Classification properties			EN 16511	EN 12104 - EN 20326	EN 16511
Wear resistance IP	EN 15468, procedure B EN 14354 (Annex D)	$\geq 5\,000$ cycles	Complies -	- Complies	Complies -
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1\,600$ mm	Complies	-	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 / Group 3: grade 4	Complies	-	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,2$ mm $\leq 0,3$ mm	Complies -	- Complies	Complies -
Swelling	ISO 24336	≤ 18 %	Complies	Complies	Complies
Dimensional Stability (heat conditions)	ISO 23999	$\leq 0,25$ %	-	-	Complies
Locking system	ISO 24334	Long side ≥ 1 KN/m / Short side ≥ 2 KN/m	-	Complies	-
Safety properties - EN 14041					
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Bfl-s2	C fl-s1	Bfl-s1
Slip Classification	EN 13893	Class	DS	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1	E1
Electrical behaviour	EN 1815	kV	Antistatic	-	Not antistatic
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable	Undetectable	Undetectable
Additional Properties					
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16	16	16
Walking noise	IHD- W431	dB %	Reduction improvement 11,4 dB Difference of loudness 45,4%	13,2 51,6	Difference of loudness 12,2dB Reduction improvement 42,0%
Thermal resistance (Thermal conductivity)	EN ISO 10456	m2K/W	0,093	R $\leq 0,150$	0,05

(a) The following products were tested: Desinfectant, C₂H₅OH, NH₄OH, Citric acid, iodine, petroleum, spirit
(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change
*Except Iodine - Grade 2 - Little change




stone Essence

Formats 905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"



Floating

Floating floor with a multilayered structure composed by the unmatched properties of cork combined with the beauty of selected stone visuals gives to this solution a natural look and feel. The 3,2mm cork top layer will provide an exceptional performance matched with a thermal and acoustic insulation, as well as a superior walking comfort and a warm atmosphere year round.

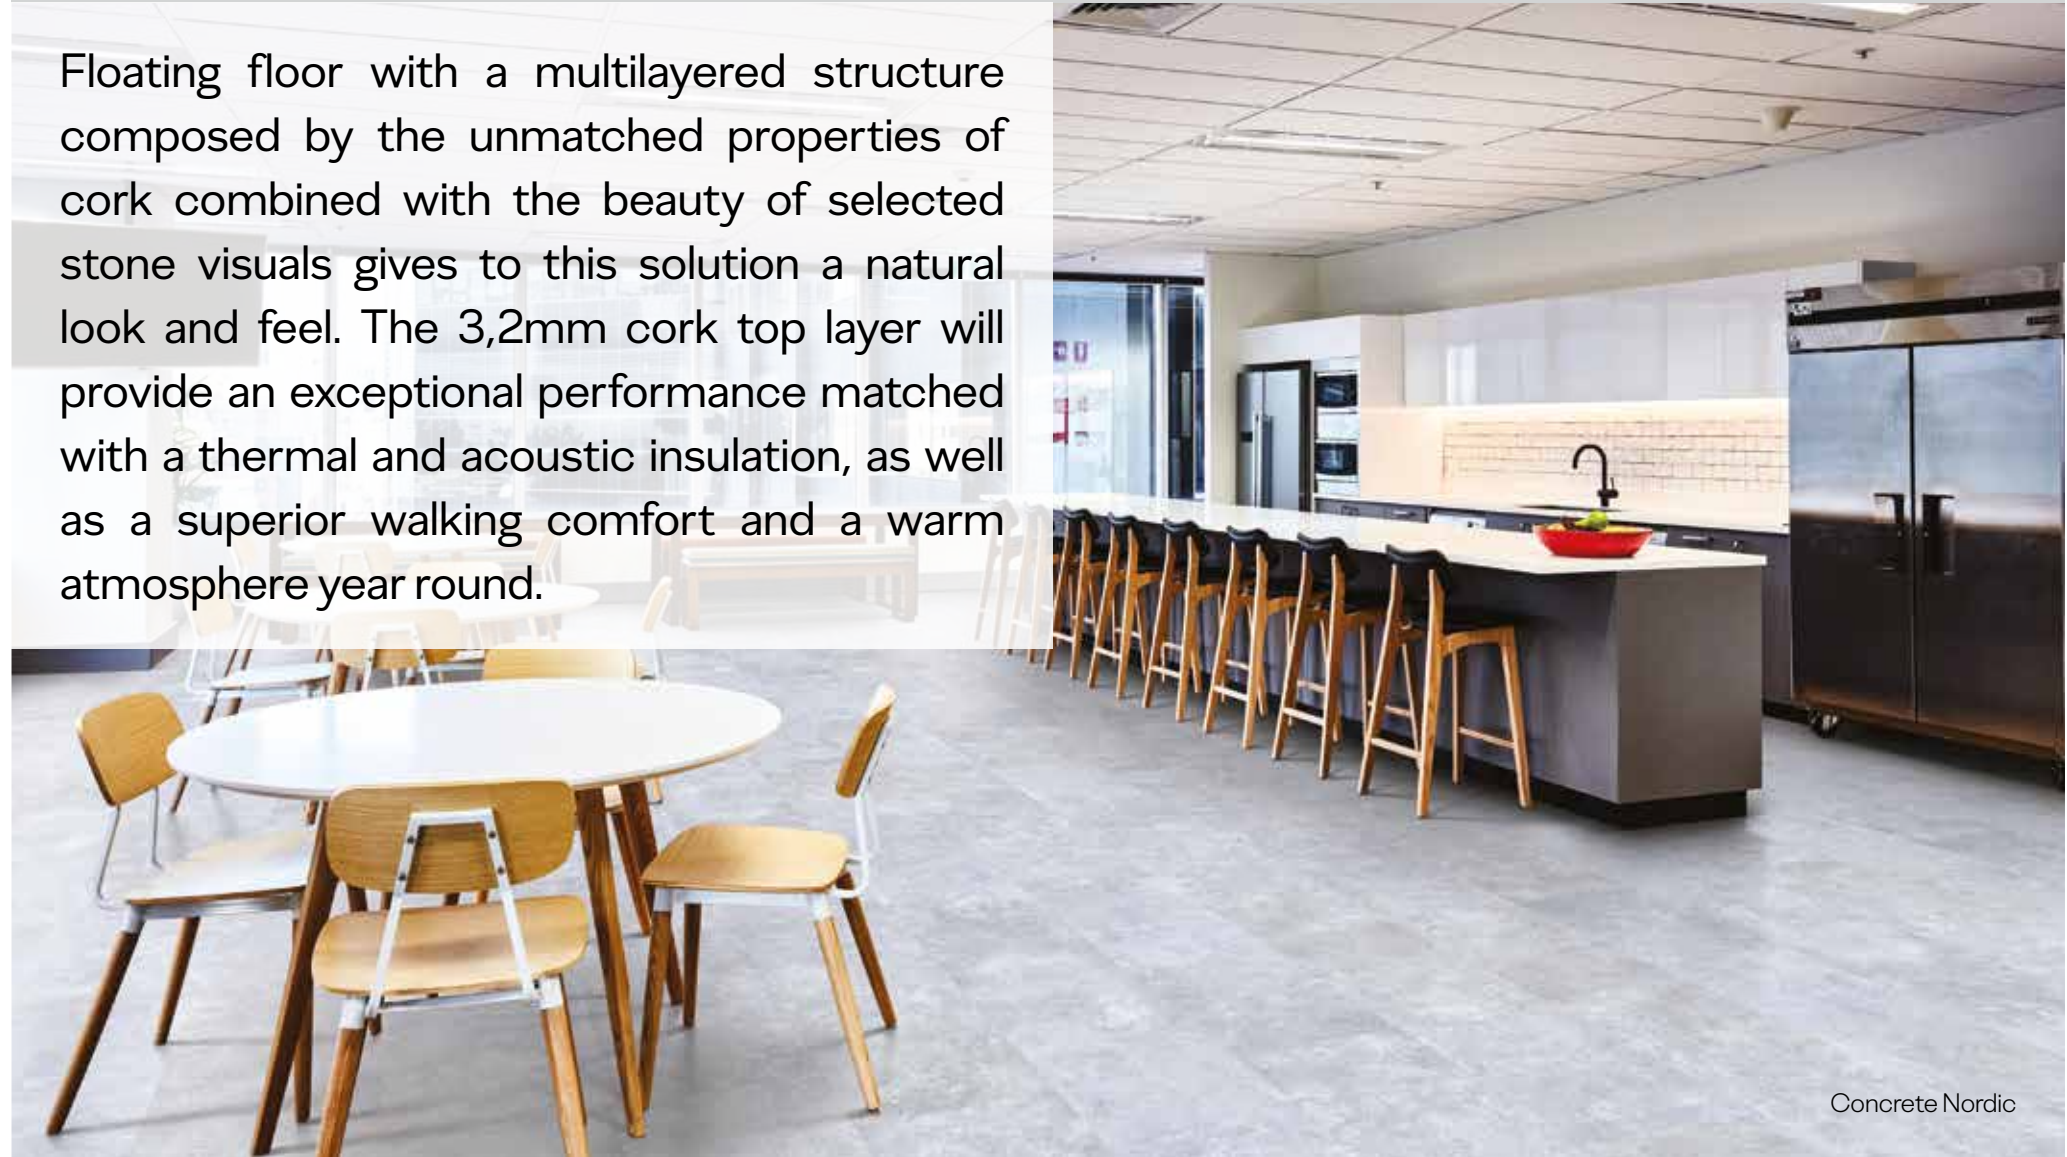

Concrete Nordic



D89D001
Concrete Nordic
80001460
905x295 x 10,5mm



D88Z001
Beton Nordic
80001452
905x295 x 10,5mm



D89H001
Azulejo Sand
80001464
905x295 x 10,5mm



D89E001
Concrete Urban
80001461
905x295 x 10,5mm



D89I001
Azulejo Cityzen
80001465
905x295 x 10,5mm



D89A001
Beton Urban *
80001457
905x295 x 10,5mm

* minimum order quantity: 250 m2



D89J001
Azulejo Forest
80001466
905x295 x 10,5mm



D89F001
Concrete Corten
80001462
905x295 x 10,5mm



D89B001
Beton Corten *
80001458
905x295 x 10,5mm



D89K001
Azulejo Cellar
80001467
905x295 x 10,5mm





D89G001
Concrete Midnight
80001463
905x295 x 10,5mm



D89C001
Beton Midnight *
80001459
905x295 x 10,5mm



Beton Corten

* minimum order quantity: 250 m2

Technical solution


PROTECTIVE SURFACE

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

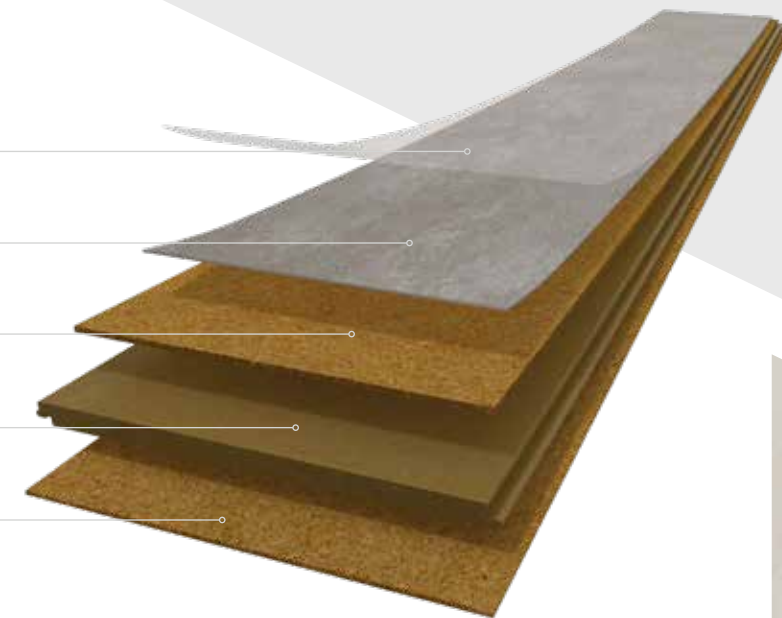

Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



























Technical Data Sheet

			stone Essence
Dimension (LxWxT)	-	-	905x295x10,5 mm 35-5/8x11-5/8x13/32"
Mass per unit	-	Kgs / sqm	7,11
Packaging (box / pallet)	-	sqm	2,136 / 76,896
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	32
	Standard-Test Method	Unit	
General Properties			EN 12104 - EN 20326
Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0.2	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Annex C)	≤ 0.25 %	Complies
Classification properties - EN 12104 - EN 20326			
Wear resistance IP	EN 14354 (Annex D)	≥ 5 0000 cycles	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies
Locking system	ISO 24334	Long side ≥ 1 kN/m Short side ≥ 2 kN/m	Complies
Safety Properties - EN 14041			
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable
Additional properties			
Impact sound reduction	EN ISO 10140	dB (ΔLw)	16
Walking noise	IHD-W431	dB %	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m2/K/W	R≤ 0,150

(a) The following products were tested: Desinfectant, C₂H₅OH, NH₄OH, Citric acid, iodine, petroleum, spirit
(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change
*Except Iodine - Grade 2 - Little change

WICANDERS’ Range

LOOKS				
 cork  wood  stone				
RANGE	Go		 	—
	Resist	—	 	—
	<i>Infinitus</i>	—	 	—
	Resist ECO	—	 	—
	Essence	 	 	 
	Hydrocork	—	 	—
 Heavy Traffic Residential areas  Moderate Traffic Commercial areas  Medium Traffic Commercial areas  Heavy Traffic Commercial areas				

The sample images presented in this brochure are cut from larger pieces. Decor and shade may vary slightly.

Amorim Cork Flooring, S.A.

Rua do Ribeirinho 202 - P.O. Box 13

4536-907 S. Paio de Oleiros - Portugal

T. +351 22 747 56 00 E. info.acf@amorim.comwww.wicanders.com

DE	Amorim Deutschland GmbH	(+49) 4221 5 93-01	info.acf.de@amorim.com
BE NE LUX	Amorim Benelux B.V.	(+31) 166 604 111	info.acf.bnl@amorim.com
AT	Amorim Deutschland GmbH	(+43) 1 54 51 65 10	info.acf.at@amorim.com
CH	Amorim Flooring Switzerland AG	(+41) 41 726 20 20	info.acf.ch@amorim.com
PT	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf@amorim.com
ES	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf.es@amorim.com
FR	Amorim Cork Flooring, S.A.	(+33) 800 914 848	info.acf.fr@amorim.com
DK	Timberman Denmark A/S	(+45) 995 252 52	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o.	(+48) 126 379 639	krakow@domkorkowy.pl
US	Amorim Flooring North America	(+1) 410 553 60 62	info.acf.us@amorim.com
RU	Amorim Flooring Rus, OOO	(+7) 495 280 7860	info.acf.ru@amorim.com
IT	Amorim Cork Flooring, S.A.	(+39) 068 635 7287	info.acf.it@amorim.com
FI	Korkkitrio Oy	(+358) 50 554 2616	wicandersmyynti@korkkitrio.fi
SW	Amorim Flooring Sweden	(+46) 311 077 40	info.acf.se@amorim.com



INVESTORS IN PEOPLE®
We invest in people Standard

AMORIM